



REGIONAL & COACH APPLICATIONS

THE MICHELIN® XZE® TIRE

Exceptional all-position radial with extra-wide, extra-deep tread designed to help deliver our best wear in high scrub in regional and line haul applications.

Line Haul	Regional	Urban	On/Off Road
<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Recommended Acceptable



Exceptional all-position radial with extra-wide, extra-deep tread designed to help deliver our best wear in high scrub in line haul and regional applications.

Customized, five-rib, zig-zag tread pattern – combines fast water evacuation for excellent wet traction with an aggressive, evolving tread pattern that helps maintain driver confidence throughout the long tread life.

Application-specific high scrub compounds – for chip and cut resistance (in LRH versions with * designation) make the MICHELIN® XZE® tire our longest wearing regional steer tire.

Solid shoulders – help resist tearing and accelerated wear in high scrub applications.

Miniature groove-wall sipes – help provide traction and more even wear.

Full-depth sipes – offer all-wheel position traction throughout the life of the tire.


Variable pitch groove walls – help prevent stones from lodging in the tread, to extend casing life and improve retreadability.

Curb guards – provides sidewall and shoulder protection.

Full-width protector ply – helps protect the working plies from bruising and penetrations, lowering downtime.

Groove bottom protectors – help deliver additional defense against stone drilling.

Rectangular bead bundle – a Michelin® exclusive - simulates a solid steel rod “strapping” the tire onto the wheel. This design stabilizes the entire bead region and minimizes fatigue in order to extend casing life.

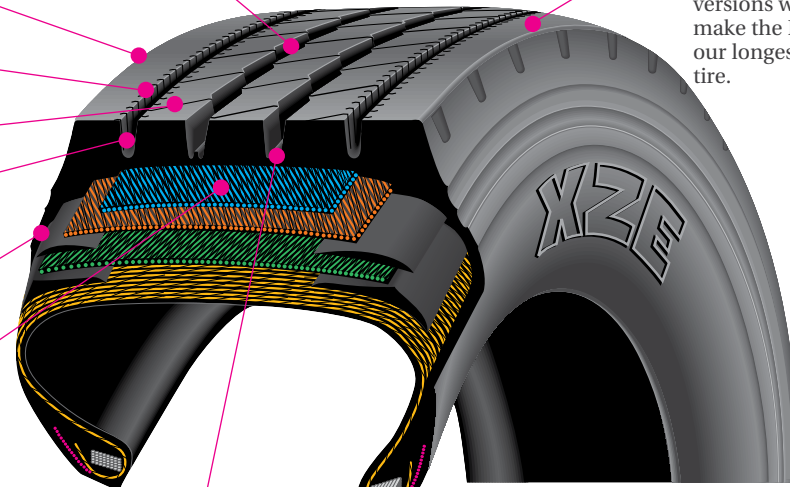

Size	Load Range	Catalog Number	Tread Depth 32nds	Max. Speed (*) mph	Loaded Radius		Overall Diameter		Overall Width (#)		Approved Wheels (Measuring wheel listed first.)	Min. Dual Spacing (#)		Revs Per Mile	Max. Load and Pressure Single				Max. Load and Pressure Dual			
					in.	mm	in.	mm	in.	mm		in.	mm		in.	mm	lbs.	psi	kg.	kPa	lbs.	psi
225/70R19.5	G	91043	17	75	14.9	378	32.2	819	8.9	227	6.00, 6.75	9.7	246	646	3970	110	1800	760	3750	110	1700	760
245/70R19.5	H	75997	18	75	15.6	396	33.6	853	9.7	247	6.75, 7.50	10.7	272	619	4940	120	2240	830	4675	120	2120	830
10R22.5	G	99141	21	75	18.7	475	40.1	1018	10.2	259	6.75, 7.50, 8.25	11.1	282	517	5675	115	2575	790	5355	115	2430	790
12R22.5 *	H	85335	22	75	19.8	503	42.6	1082	11.4	290	8.25, 9.00	13.2	335	486	7390	120	3350	830	6780	120	3075	830
255/70R22.5 *	H	61737	18	75	17.2	437	36.7	932	10.2	260	8.25, 7.50	11.6	295	563	5510	120	2500	830	5070	120	2300	830
275/80R22.5	H	01637	22	75	18.7	475	40.2	1022	11.1	282	8.25, 7.50	12.2	311	516	7160	120	3250	830	6610	120	3000	830

* With chip and cut resistant tread compound.

Note: Wheel listed first is the measuring wheel.

(*) Exceeding the lawful speed limit is neither recommended nor endorsed.

(#) Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in wheel width. Minimum dual spacing should be adjusted accordingly.

MICHELIN® tires and tubes are subject to a continuous development program. Michelin North America, Inc. reserves the right to change product specifications at any time without notice or obligations. Please consult wheel manufacturer's load and inflation limits. Never exceed wheel manufacturer's limits without permission of component manufacturer.

www.michelintruck.com

United States
Michelin North America, Inc.
 One Parkway South
 Greenville, SC 29615
 1-888-622-2306

Canada
Michelin North America (Canada), Inc.
 2500 Daniel Johnson, Suite 500
 Laval, Quebec H7T 2P6
 1-888-871-4444

Mexico
Industrias Michelin, S.A. de C.V.
 Av. 5 de febrero No. 2113-A
 Fracc. Industrial Benito Juarez
 7 6120, Querétaro, Qro. Mexico
 011 52 442 296 1600