

# MICHELIN<sup>®</sup>

## XZL<sup>™</sup>

The all-terrain, all-position radial  
for special service such as  
Emergency Response vehicles.



**MICHELIN**

*A better way forward*

# MICHELIN® XZL™

The all-terrain, all-position radial for special service such as Emergency Response vehicles.

**Optimized tread design** features open shoulders and offset tread elements for excellent traction and handling on varied terrains including snow, sand, mud, and highway.

**Non-directional tread design** for added versatility.

**Buttressed shoulder blocks** offer extra sidewall protection.

**Application-specific tread compounds** help provide excellent chip resistance, maximizing tread and casing life.

**Full-width steel belts and elastic protector ply** help provide extra casing protection against off-road hazards.

**Tubeless construction** compatible with central inflation systems as well as bead locks and/or run-flat devices.

**Radial design** helps deliver a smooth, quiet ride that helps insulate troops and shock-sensitive equipment.

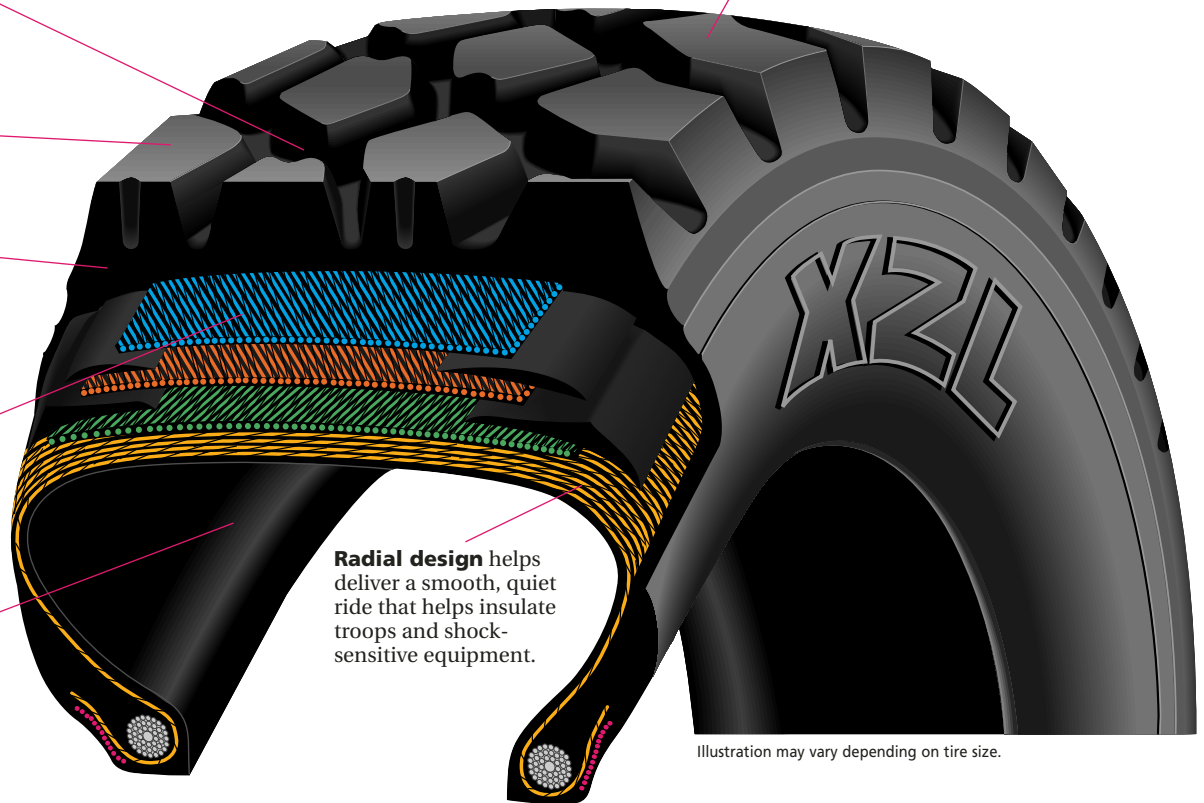


Illustration may vary depending on tire size.

## Specifications for Tread Design: XZL™

Size	Load Range	Catalog Number	Tread Depth 32nds	Max Speed (*) mph	Loaded Radius		Overall Diameter		Overall Width (+)		Approved Rims	Revs per Mile	Max. Tire Load Single			
					in.	mm.	in.	mm.	in.	mm.			lbs.	psi	kg.	kPa
24R21 (1, 2)	H	76025	31	55	24.8	631	54.6	1388	23.9	608	18.00	383	15700	85	7100	590
395/85R20 (3)	G	37727	33	70	21.4	544	46.8	1189	15.3	388	10.00W, 10.00, 10.00V	420	9370	95	4250	660

(1) Tubeless, may be used with tube.

(2) Tube Code: 21 WAM, Valve Ref.: 1837, Tube Catalog Number: 39650. Flap Code: 17-20, Flap Catalog Number: 00935.

(3) Tube Code: 20S, Valve Ref.: 582, Tube Catalog Number: 32420. Flap Code: 20x10.00, Flap Catalog Number: 47501, Nylon Plate Included.

Note: Rim listed first is the measuring rim.

(\*) Exceeding the lawful speed limit is neither recommended nor endorsed.

(+) Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width.

Michelin® tires and tubes are subject to a continuous development program. Michelin North America, Inc. reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturer's load and inflation limits. Never exceed rim manufacturer's limits without permission of component manufacturer.

MICHELIN NORTH AMERICA, INC., Greenville, South Carolina, USA  
 MICHELIN NORTH AMERICA (CANADA) INC., Laval, Quebec, Canada  
 MICHELIN MEXICO S.A. DE C.V., Mexico City, Mexico

An Equal Opportunity Employer

© 2005 MNA, Inc. MWL41149 (06/05)

