



URBAN APPLICATIONS

# THE MICHELIN® X® INCITY™ Z SL

An all-position tire designed for the challenges of urban transit operations. This is a Single Life tire that offers optimized mileage and durability.

## Durable and Dependable

Designed to withstand tough conditions


- **Extra Thick Sidewalls**  
Strong protection against shocks, impacts and curb scrub
- **Full Width Elastic Protector Ply**  
Michelin exclusive
- **Sidewall Wear Indicators**  
Promote timely tire rotation for long casing life and enhanced retreadability
- **Extended Metallic Chafer**  
Dissipates heat in bead area
- **Optimized Bead Architecture**  
Designed to improve bead durability

## Optimized Tread Life

Longer tread life

- **Scrub Resistant Compound**  
Fights treadwear
- **Wear Resistant Tread Pattern**  
Optimized for urban bus conditions and for the reduction of irregular wear<sup>(1)</sup>
- **Wide Footprint**  
Distributes force for longer tread life


**SL (Single Life)  
DO NOT RETREAD**

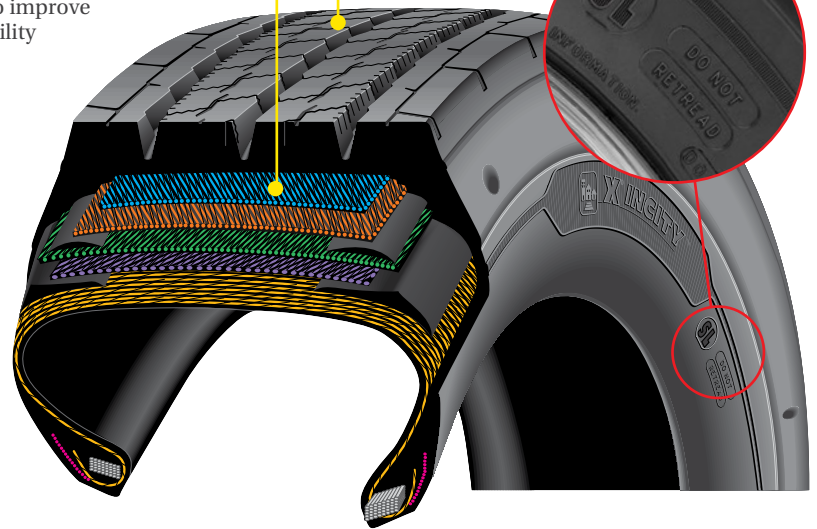

## Driver Confidence

Outstanding traction with *Matrix™* Siping

- **Matrix™ Sipes**  
Provide inter-locking action which offers excellent traction and even wear
- **Zig-Zag Groove Walls**  
Provide optimized biting edges and excellent water and snow evacuation
- **Full Depth Sipes**  
Provide excellent traction throughout the life of the tread



Line Haul	Regional	Urban	On/Off Road
Recommended	Recommended	Recommended	Acceptable

## Outstanding Fuel Efficiency

Low rolling resistance without compromising tread life

- **Optimized Design**  
Compounds and tread pattern combine to deliver outstanding fuel efficiency and mileage for urban applications

Size	Load Range	Catalog Number	Tread Depth		Loaded Radius		Overall Diameter		Overall Width (‡)		Approved Wheels (Measuring wheel listed first.)	Min. Dual Spacing (‡)		Revs Per Mile	Max. Load and Pressure Single				Max. Load and Pressure Dual			
			32nds	mph	in.	mm	in.	mm	in.	mm		in	mm		lbs.	psi	kg.	kPa	lbs.	psi	kg.	kPa
305/85R22.5 <sup>(2)</sup>	J	62156	24	68	20.0	507	42.7	1085	11.7	298	9.00, 8.25	13.2	335	485	7830	120	3550	830	7160	120	3250	830

Note: Wheel listed first is the measuring wheel.

(1) Urban Transit buses fitted with 12R22.5 or 305/85R22.5 dimensions should only use the MICHELIN® X® INCITY™ Z and X® INCITY™ Z SL tires.

(2) "No bus shall be operated with regrooved, recapped or retreaded tires on the front wheels." US Code of Federal Regulations: Title 49, Transportation; Part 393.75.

(\*) Exceeding the lawful speed limit is neither recommended nor endorsed.

(‡) Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in wheel width. Minimum dual spacing should be adjusted accordingly.

MICHELIN® tires and tubes are subject to a continuous development program. Michelin North America, Inc. reserves the right to change product specifications at any time without notice or obligations.

Please consult wheel manufacturer's load and inflation limits. Never exceed wheel manufacturer's limits without permission of component manufacturer.

[www.michelintruck.com](http://www.michelintruck.com)

United States - Michelin North America, Inc., One Parkway South, Greenville, SC 29615, 1-888-622-2306  
 Canada - Michelin North America (Canada), Inc., 2500 Daniel Johnson, Suite 500, Laval, Quebec H7T 2P6, 1-888-871-4444  
 Mexico - Industrias Michelin, S.A. de C.V., Av. 5 de febrero No. 2113-A, Fracc. Industrial Benito Juarez, 7 6120, Querétaro, Qro. Mexico, 011 52 442 296 1600

Copyright © 2017 Michelin North America, Inc. The Michelin Man is a registered trademark owned by Michelin North America, Inc. All rights reserved. An Equal Opportunity Employer (04/17)

